

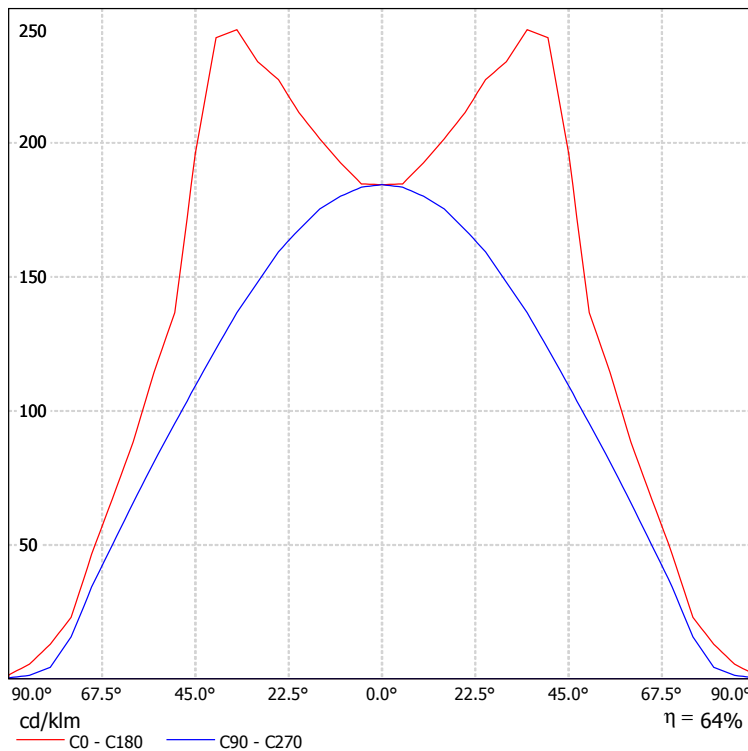
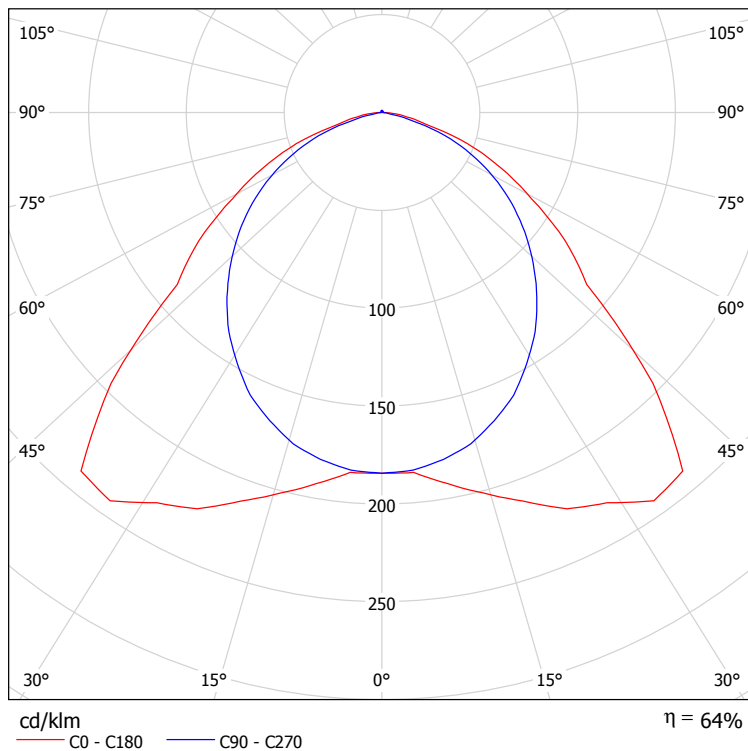
Honeywell Life Safety AS
Terminalen 16
Lierstranda Industriområde
3400 Lier

Operator
Telephone
Fax
e-Mail

TM Technologie Smart 44 8W / IDC Data Sheet

Luminaire: TM Technologie Smart
44 8W

Lamps: 1 x L8W



Datasheet for emergency lighting

 Honeywell Life Safety AS
 Terminalen 16
 Lierstranda Industriområde
 3400 Lier

 Operator
 Telephone
 Fax
 e-Mail

TM Technologie Smart 44 8W / Data sheet emergency lighting



Luminaire: TM Technologie Smart 44 8W

Lamps: 1 x L8W






Colour rendering index:	60
Luminous flux:	400 lm
Correction Factor:	1.000
Emergency lighting factor:	1.00
Emergency lighting luminous flux:	400 lm
Light output ratio:	64.02
Light output ratio (lower half space):	99.45
Light output ratio (upper half space):	0.55

Glare valuation (Maximum luminous intensity [cd])

	C0	C90	C0 - C360
Gamma 60° - 90°	35.3	26.3	40.2
Gamma 0° - 180°	96.9	73.7	96.9

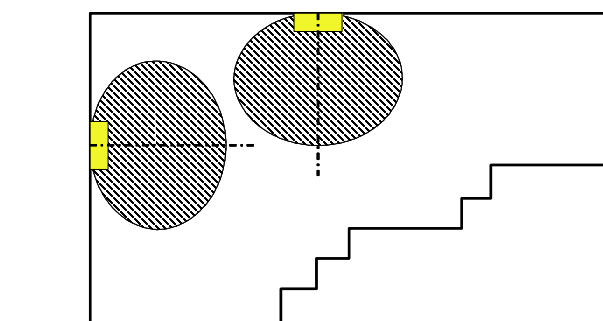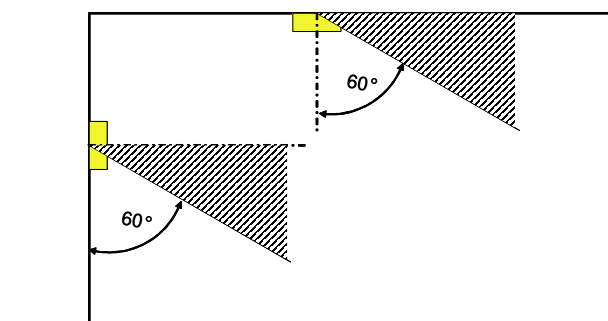

Distance table for even escape routes

Mounting Height [m]					
2.00	3.33	8.12	7.82	7.49	2.97
2.50	3.57	8.97	8.63	8.23	3.20
3.00	3.84	9.72	9.31	8.80	3.33
3.50	4.03	10.37	9.87	9.25	3.50
4.00	4.29	10.88	10.29	9.58	3.48

The spacing table is based on the following parameters:

- Maintenance factor: 0.80
- Emergency lighting factor: 1.00
- Minimum illuminance on centre line: 1.00 lx
- Minimum illuminance on half of escape route width: 0.50 lx
- Diversity on the centre line max. 40 : 1
- Width of escape route: 2.00 m